

## BABUS 2

Recessed optic IP rated downlight

design Roberto Mantovani



IP67-rated, recessed fixtures of the highest build quality, extremely compact dimensions and high output. Recessed optics guarantee high viewing comfort. Extra-clear tempered glass, ATEX cable gland, neoprene cable. Can also be installed with anti-glare filter for maximum viewing comfort.

Incassi IP67 di altissima qualità costruttiva, con dimensioni estremamente contenute ed elevati flussi luminosi. L'ottica arretrata garantisce un alto comfort visivo. Vetro extrachiaro temprato, pressacavo ATEX, cavo in neoprene. Equipaggiabili con filtro antiabbagliamento per il massimo comfort visivo.

Encastrables IP67 de très haute qualité constructive, avec des dimensions extrêmement contenues et flux lumineux élevés. L'optique en retrait garantit un confort visuel élevé. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. Peuvent être équipés avec filtre anti-éblouissement pour le meilleur confort visuel.



IP67 made in Italy

Einbau mit Schutzklasse IP67 mit hoher konstruktiver Qualität von extrem kleiner Größe und hohen Lichtströmen. Die Einbauoptik garantiert einen hohen visuellen Komfort. Extra gehärtetes Glas, ATEX Kabeldurchführung, Neopren-Kabel. Kann mit Blendschutzfilter ausgestattet werden für maximalen visuellen Komfort.

Empotrados IP67 de altísima calidad constructiva, con tamaño sumamente reducido y elevados flujos luminosos. La óptica retrocedida garantiza un alto confort visual. Vidrio ultraclaro templado, prensacables ATEX, cable de neopreno. Se pueden equipar con filtro antideslumbramiento para obtener el máximo confort visual.

**Supply current**  
350-500mA (V, 2.9V)


**Power**  
1-2W

**Series wiring**


**CRI**  
85

**2-Step MacAdam**

**Dimensions**



**Photometric diagrams**

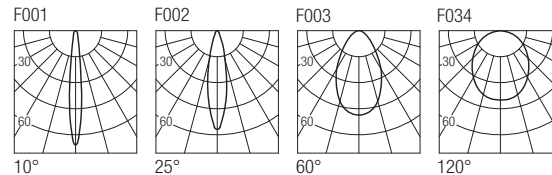


**CCT/CRI/Flux**

	350mA	500mA
2700K	89lm	128lm
3000K	93lm	133lm
4200K	103lm	154lm
6000K	114lm	165lm


**Code construction**

BT1 X X X

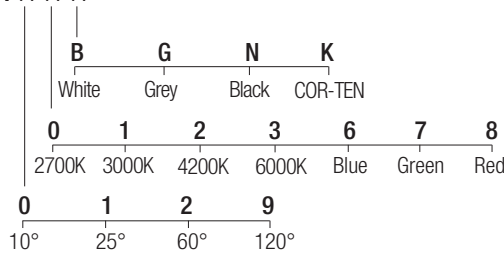

**Accessories**

**CSBU01**  
Recessing box



**LBT101**  
Low luminance louver



**Note:** The filter must be ordered together with the lighting fixture.

**Drivers 350mA**

on/off  
**AL1034** (1..11) IP20 30 mm  
**AL1035** (1..11) IP20 40 mm  
**AL1037** (1..16) IP20 S.P. 55 mm  
**AL9011** (1..12) IP67 44 mm

dimmmable  
**AL4000** (1..12) IP20 PUSH 0/1..10V 72 mm  
**ALD435** (1..11) IP20 DALI 2 PUSH 36 mm  
**AL4051** (2..14) IP20 DALI 2 72 mm  
**AL4053** (1..14) IP20 PUSH IGBT-TRIAC 56 mm  
**AL6035** (2..8) IP67 DALI 2 44 mm  
**AL8035** (4..16) IP67 DALI 2 48 mm

**Drivers 500mA**

on/off  
**AL1074** (1..7) IP20 30 mm  
**AL1077** (1..6) IP20 40 mm  
**AL1084** (1..11) IP20 S.P. 55 mm  
**AL9051** (1..11) IP67 44 mm

dimmmable  
**AL4010** (1..12) IP20 PUSH 0/1..10V 72 mm  
**ALD450** (1..7) IP20 DALI 2 PUSH 36 mm  
**AL4151** (2..14) IP20 DALI 2 72 mm  
**AL4153** (1..14) IP20 PUSH IGBT-TRIAC 56 mm  
**AL6050** (2..6) IP67 DALI 2 44 mm  
**AL8050** (4..16) IP67 DALI 2 48 mm