

CORE 10

Recessed optic downlights

design Lapo Grassellini



The Core range of recessed fixtures matches utmost performance to incredible compactness. Recessed optics guarantees high viewing comfort. Revolutionary in dissipative, functional design, it offers the possibility to combine colour temperatures and beam angles in CRI85 and CRI93 versions.

La gamma di incassi Core combina altissime prestazioni ad una dimensione incredibilmente contenuta. L'ottica arretrata garantisce un alto comfort visivo. Rivoluzionari per il design funzionale alla dissipazione, offrono la possibilità di combinare temperature colore ed aperture di fascio nelle versioni a CRI85 ed a CRI93.

La gamme d'encastrables Core associe prestations très élevées et dimension incroyablement contenue. L'optique en retrait garantit un confort visuel élevé. Révolutionnaires pour le design fonctionnel à la dissipation, ils offrent la possibilité d'associer températures, couleur et ouvertures de faisceau dans les versions à CRI85 et à CRI93.



IP44 made in Italy

Die Produktreihe von Einbauleuchten Core kombiniert beste Leistungen mit einer unglaublich kompakten Größe. Die Einbauoptik garantiert einen hohen visuellen Komfort. Revolutionär durch ihr funktionales Design zur Ableitung, bietet sie die Möglichkeit, Farbtemperaturen und Strahlenbündel in den Versionen CRI85 und CRI93 zu kombinieren.

La gama de empotrados Core combina elevadísimas prestaciones con un tamaño increíblemente reducido. La óptica retrocedida garantiza un alto confort visual. Revolucionarios por su diseño centrado en la disipación, ofrecen la posibilidad de combinar temperaturas de color y aberturas de haz en las versiones de CRI85 y de CRI93.

Supply current

250mA (V_f 36V)

Power


10W

CRI


85-93

2-Step MacAdam

Dimensions

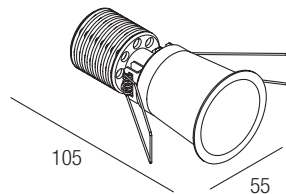

Photometric diagrams

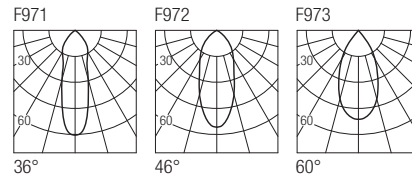


CCT/CRI/Flux

	CRI85	CRI93
2700K	890lm	840lm
3000K	1000lm	930lm
4000K	1040lm	960lm

Code construction

C1 X X X X

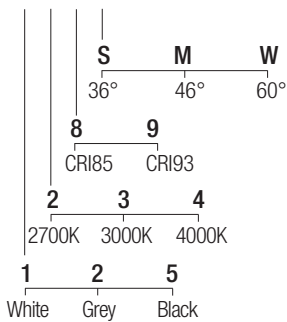

Accessories

LOH1 LOH1B LOH1G

White Black Grey

Low luminance louver



SC101

Milky screen



Note: The screen must be ordered together with the lighting fixture.

Drivers 250mA

on/off

AL1025 (1) IP20 \varnothing 40 mm

dimmmable

AL4030 (1) IP20 0/1..10V \varnothing 55 mm

ALD425 (1) IP20 DALI 2 PUSH \varnothing 36 mm

AL4031 (1) IP20 DALI 2 \varnothing 55 mm

AL4032 (1) IP20 IGBT-TRIAC \varnothing 55 mm