


## FATBOY 2

Uplights

design Roberto Mantovani



**IP67 made in Italy**



IP67-rated, ground recessed fixtures of the highest build quality, extremely compact dimensions and high output. Fully anodized aluminium body, versions with front in vehicle-proof AISI 316L stainless steel and in walkable powder-coated anodized aluminium. Extra-clear tempered glass, ATEX cable gland, neoprene cable.

Incassi a terra IP67 di altissima qualità costruttiva, con dimensioni estremamente contenute ed elevati flussi luminosi. Corpo in alluminio anodizzato a spessore, versioni con frontale in acciaio INOX AISI316L carrabili, in alluminio anodizzato e verniciato a polveri calpestabili. Vetro extrachiario temprato, pressacavo ATEX, cavo in neoprene.

Encastrables au sol IP67 de très haute qualité constructive, avec des dimensions extrêmement contenues et flux lumineux élevés. Corps en aluminium anodisé à épaisseur, versions avec frontal en acier INOX AISI316L carrossables, en aluminium anodisé et peint en poudre praticables. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène.

Einbau am Boden mit Schutzklasse IP67 mit hoher konstruktiver Qualität von extrem kleiner Größe und hohen Lichtströmen. Gehäuse aus eloxiertem Aluminium mit Stärke, Versionen mit Vorderteil aus Edelstahl AISI 316L, aus eloxiertem und pulverbeschichtetem Aluminium. Extra gehärtetes Glas, ATEX Kabeldurchführung, Neopren-Kabel.

Empotrados de suelo IP67 de altísima calidad constructiva, con tamaño sumamente reducido y elevados flujos luminosos. Cuerpo de aluminio anodizado a ras, versiones con frontal de acero inoxidable AISI316L transitables, de aluminio anodizado y barnizado en polvo peatonales. Vidrio ultraclaro templado, prensacables ATEX, cable de neopreno.

**Supply current**  
350-500mA (V, 2.9V)


**Power**  
1-2W

**Series wiring**


**CRI**  
85

**2-Step MacAdam**

**Dimensions**




**Photometric diagrams**

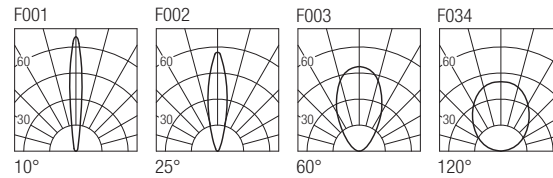

**CCT/CRI/Flux**

	350mA	500mA
2700K	89lm	128lm
3000K	93lm	133lm
4200K	103lm	154lm
6000K	114lm	165lm


**Code construction**

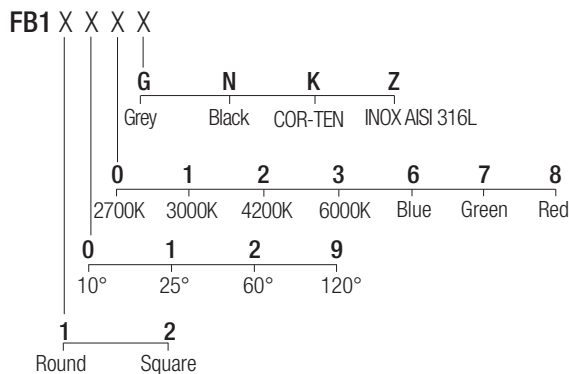

**Note:** Made-to-measure cable available on request.

**Accessories**

**CSFB01**  
Recessing box



**Drivers 350mA**

on/off  
**AL1034** (1..11) IP20 ⌀ 30 mm  
**AL1035** (1..11) IP20 ⌀ 40 mm  
**AL1037** (1..16) IP20 S.P. ⌀ 55 mm  
**AL9011** (1..12) IP67 ⌀ 44 mm

dimmmable  
**AL4000** (1..12) IP20 PUSH 0/1..10V ⌀ 72 mm  
**ALD435** (1..11) IP20 DALI 2 PUSH ⌀ 36 mm  
**AL4051** (2..14) IP20 DALI 2 ⌀ 72 mm  
**AL4053** (1..14) IP20 PUSH IGBT-TRIAC ⌀ 56 mm  
**AL6035** (2..8) IP67 DALI 2 ⌀ 44 mm  
**AL8035** (4..16) IP67 DALI 2 ⌀ 48 mm

**Drivers 500mA**

on/off  
**AL1074** (1..7) IP20 ⌀ 30 mm  
**AL1077** (1..6) IP20 ⌀ 40 mm  
**AL1084** (1..11) IP20 S.P. ⌀ 55 mm  
**AL9051** (1..11) IP67 ⌀ 44 mm

dimmmable  
**AL4010** (1..12) IP20 PUSH 0/1..10V ⌀ 72 mm  
**ALD450** (1..7) IP20 DALI 2 PUSH ⌀ 36 mm  
**AL4151** (2..14) IP20 DALI 2 ⌀ 72 mm  
**AL4153** (1..14) IP20 PUSH IGBT-TRIAC ⌀ 56 mm  
**AL6050** (2..6) IP67 DALI 2 ⌀ 44 mm  
**AL8050** (4..16) IP67 DALI 2 ⌀ 48 mm