

GAGARIN PT2

Trimless pendants

design Roberto Mantovani



A trimless recessed suspended luminaire for ceiling installation, characterized by a minimal design and high optical performance. It lends itself to accent lighting applications, giving the chance to combine various color temperatures and beam angles, with CRI85.

Apparecchio sospeso per installazione ad incasso trimless, connotato da un design minimale ed elevate prestazioni ottiche, si presta ad applicazioni di luce d'accento. Offre la possibilità di combinare temperature colore ed aperture di fascio, con CRI85.

Luminaire suspendu pour installation encastré à plafond trimless, caractérisé par un design minimaliste et de hautes performances optiques. C'est indiqué pour applications allant d'éclairage d'accentuation. Il offre la possibilité de combiner les températures de couleur et les angles de faisceau, avec CRI85.

Eine rahmenlose Hängeleuchte für den Deckeneinbau, die sich durch ein minimalistisches Design und hohe optische Leistung auszeichnet. Sie eignet sich für die Akzentbeleuchtung und bietet die Möglichkeit, verschiedene Farbtemperaturen und Strahlungswinkel mit CRI85 zu kombinieren.

CE  IP20 made in Italy

Una luminaria suspendida empotrable sin bordes para la instalación en el techo, caracterizada por un diseño mínimo y un alto rendimiento óptico. Se presta para aplicaciones de iluminación de acento, dando la oportunidad de combinar varias temperaturas de color y ángulos de haz, con CRI85.

Supply current

500mA (V, 2,9V)

Power

2W


Series wiring

CRI


85

2-Step MacAdam

Dimensions

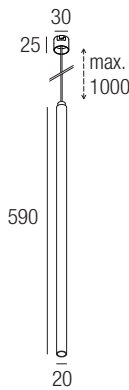


Photometric diagrams

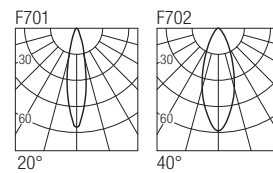

CCT/CRI/Flux

2700K	128 lm
3000K	133 lm
4200K	154 lm


Code construction

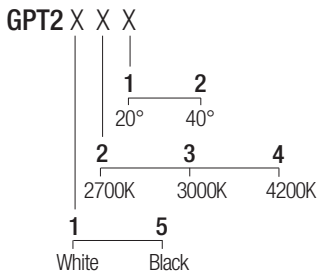

Note: Made-to-measure cable available on request.

Accessories

ZQC001 ZQC001B
White Black



Plasterboard recessing frame


AL7022

24VDC/500mA constant current converter

Drivers 500mA

on/off

AL1074 (1..7) IP20  30 mm

AL1077 (1..6) IP20  40 mm

AL1084 (1..11) IP20 S.P.  55 mm

dimmmable

AL4010 (1..12) IP20 PUSH 0/1..10V  72 mm

ALD450 (1..7) IP20 DALI 2 PUSH  36 mm

AL4151 (2..14) IP20 DALI 2  72 mm

AL4153 (1..14) IP20 PUSH IGBT-TRIAC  56 mm