

GAGARIN PT6

Trimless pendants

design Roberto Mantovani



A trimless recessed suspended luminaire for ceiling installation, characterized by a minimal design and high optical performance. It lends itself to accent or general lighting applications, giving the chance to combine various color temperatures and beam angles, with CRI98 and R9 93. Can be fitted with an anti-glare filter for maximum visual comfort.

Apparecchio sospeso per installazione ad incasso trimless, connotato da un design minimale ed elevate prestazioni ottiche, si presta ad applicazioni che vanno dalla luce d'accento all'illuminazione generale. Offre la possibilità di combinare temperature colore ed aperture di fascio, con CRI98 ed R9 93. Equipaggiabile con l'accessorio filtro antiabbagliamento, per assicurare il miglior comfort visivo dell'installazione.

Luminaire suspendu pour installation Encastré à plafond trimless, caractérisé par un design minimaliste et de hautes performances optiques. Il est indiqué pour les applications allant de l'éclairage d'accentuation à l'éclairage général. Il offre la possibilité de combiner les températures de couleur et les angles de faisceau, avec CRI98 et R9 93. Disponibilité dans les accessoires du filtre anti-éblouissement pour le meilleur confort visuel.

Eine rahmenlose Hängeleuchte für den Deckeneinbau, die sich durch ein minimalistisches Design und hohe optische Leistung auszeichnet. Sie eignet sich für Akzent- oder Allgemeinbeleuchtungsanwendungen und bietet die Möglichkeit, verschiedene Farbtemperaturen und Abstrahlwinkel mit CRI98 und R9 93 zu kombinieren. Sie kann mit einem Blendschutzfilter für maximalen Sehkomfort ausgestattet werden.

CE IP20 made in Italy

Supply current

500mA (V_f 9V)

Power

6W


Series wiring

CRI


98

2-Step MacAdam

Dimensions

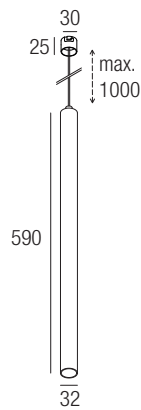


Photometric diagrams

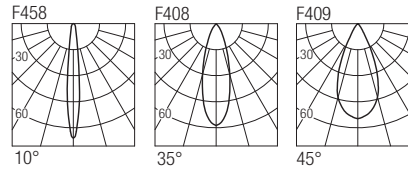

CCT/CRI/Flux

2700K	540 lm
3000K	600 lm
4200K	620 lm

Code construction

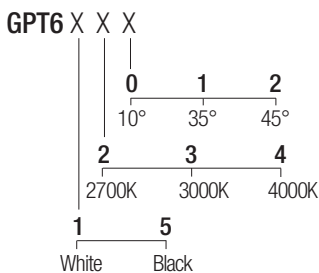


Note: Made-to-measure cable available on request.

Accessories

ZQC001 ZQC001B

White Black

Plasterboard recessing frame



LJ02 LJ02B

White Black

Low luminance louver



SJ02 SJ02B

White Black

Milky screen



Note: The filter and screen are not compatible with the 10° lens versions.

Drivers 500mA

on/off

AL1074 (1..2) IP20 30 mm

AL1077 (1..2) IP20 40 mm

AL1084 (1..3) IP20 S.P. 55 mm

dimmable

AL4010 (1..4) IP20 PUSH 0/1..10V 72 mm

ALD450 (1..2) IP20 DALI 2 PUSH 36 mm

AL4151 (1..4) IP20 DALI 2 72 mm

AL4153 (1..4) IP20 PUSH IGBT-TRIAC 56 mm

AL7022

24VDC/500mA constant current converter