

GAGARIN T10

Pendant luminaire for 24VDC tracks

design Roberto Mantovani



A suspended luminaire for 24VDC track, characterised by a minimal design and high optical performance. It lends itself to applications ranging from accent lighting to general illumination giving the chance to combine various color temperatures and beam angles, with CRI98 and R9 93. Can be fitted with an anti-glare filter for maximum visual comfort.

Apparecchio sospeso per binario 24VDC, connotato da un design minimale ed elevate prestazioni ottiche. Si presta ad applicazioni che vanno dalla luce d'accento all'illuminazione generale. Offre la possibilità di combinare temperature colore ed aperture di fascio, con CRI98 ed R9 93. Equipaggiabile con l'accessorio filtro antiabbagliamento, per assicurare il miglior comfort visivo dell'installazione.

Un luminaire suspendu pour rail 24VDC, caractérisé par un design minimaliste et de hautes performances optiques. Il est indiqué pour les applications allant de l'éclairage d'accentuation à l'éclairage général. Il offre la possibilité de combiner les températures de couleur et les angles de faisceau, avec CRI98 et R9 93. Disponibilité dans les accessoires du filtre anti-éblouissement pour le meilleur confort visuel.

Eine Hängeleuchte für 24VDC Stromschienen, die sich durch ein minimales Design und hohe optische Leistung auszeichnet. Sie eignet sich für Akzent- oder Allgemeinbeleuchtungsanwendungen und bietet die Möglichkeit, verschiedene Farbtemperaturen und Abstrahlwinkel mit CRI98 und R9 93 zu kombinieren. Sie kann mit einem Blendschutzfilter für maximalen Sehkomfort ausgestattet werden.

Aparato colgante para carril 24VDC, caracterizado por un diseño minimalista y un alto rendimiento óptico. Se presta a aplicaciones que van desde la iluminación de acento hasta la iluminación general, dando la oportunidad de combinar varias temperaturas de color y ángulos de haz, con CRI98 y R9 93. Puede ser equipado con un filtro antideslumbrante para el máximo confort visual.

CE IP20 made in Italy

Supply current

24VDC

Power


10W

CRI


85-93

2-Step MacAdam

Dimensions

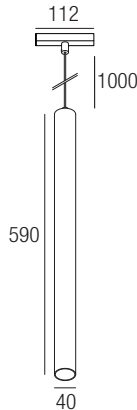


Photometric diagrams

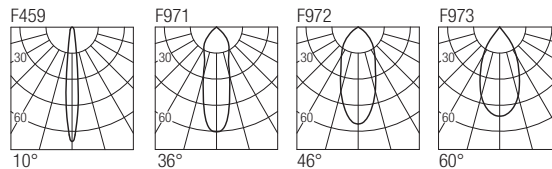

CCT/CRI/Flux

	CRI85	CRI93
2700K	890lm	840lm
3000K	1000lm	930lm
4000K	1040lm	960lm

Code construction

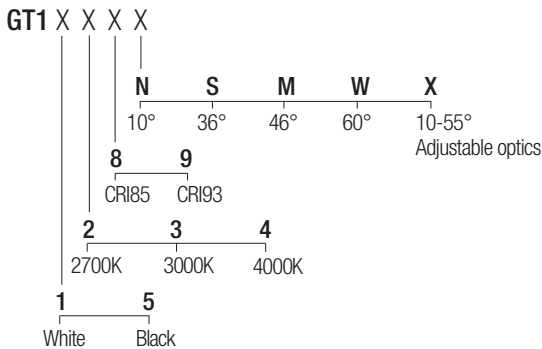

Note: Made-to-measure cable available on request.

Accessories

LJ01 White

LJ01B Black



Low luminance louver

SJ01 White

SJ01B Black



Milky screen

Note: The filter and screen are not compatible with the 10° and adjustable 10-55° lens versions.