


GLASS 6

Uplights

design Roberto Mantovani

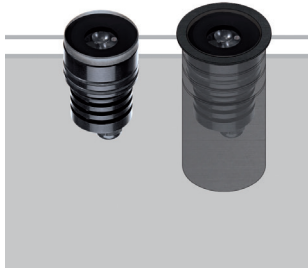

A walkable IP67 for ground recessing of the highest build quality and with a glass front. Extremely small dimensions combine with elevated luminous fluxes. With a body in thick anodised aluminium, it has tempered extra-clear glass, an ATEX cable gland and neoprene cable. Can be fitted with an anti-glare filter for maximum visual comfort.

Incassi a terra IP67 calpestabili di altissima qualità costruttiva, con frontale in vetro. Dimensioni estremamente contenute ed elevati flussi luminosi. Corpo in alluminio anodizzato a spessore, vetro extrachiaro temprato, pressacavo ATEX, cavo in neoprene. Equipaggiabili con filtro antiabbagliamento per il massimo comfort visivo.

Spots à encastrer au sol IP67 de très haute qualité de construction, avec façade en verre. Dimensions extrêmement limitées et à flux lumineux élevés. Corps en aluminium anodisé épais, verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. Peut être équipé de filtre anti-éblouissement pour le plus grand confort visuel.



IP67 made in Italy

IP67 begehbare Bodeneinbauleuchten von sehr hoher Bauqualität, mit Glasfront. Extrem kleine Abmessungen und hohe Lichtströme. Dickes, eloxiertes Aluminiumgehäuse, gehärtetes, extraklares Glas, ATEX-Kabelverschraubung, Neoprenkabel. Kann mit Blendschutzfilter für maximalen Sehkofort ausgestattet werden.

Luminarias empotrables de suelo IP67 transitables de muy alta calidad de fabricación, con frente de vidrio. Dimensiones extremadamente reducidas y elevados flujos luminosos. Cuerpo grueso de aluminio anodizado, cristal extraclaro templado, prensaestopas ATEX, cable de neopreno. Se puede equipar con un filtro antideslumbrante para un máximo confort visual.

Supply current

350-500 mA (V, 8,7V)

Power

3-6 W


Series wiring

CRI


85

2-Step MacAdam

Dimensions



Photometric diagrams

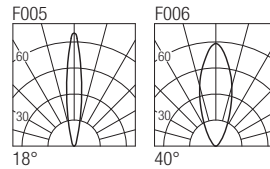


CCT/CRI/Flux

	350mA	500mA
2700K	267lm	384lm
3000K	279lm	400lm
4200K	309lm	462lm
6000K	342lm	495lm

Code construction

GS6 X X

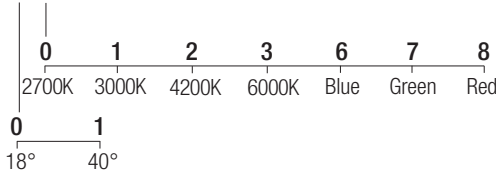


Note: Made-to-measure cable available on request.

Accessories

CSGS01

Recessing box with trim

Note: Recessing box needed for installation.



LGS601

Low luminance louver



Note: The filter must be ordered together with the lighting fixture.

Drivers 350mA

on/off

- AL1034 (1..3) IP20 ⌀ 30 mm
- AL1035 (1..3) IP20 ⌀ 40 mm
- AL1037 (1..5) IP20 S.P. ⌀ 55 mm
- AL9011 (1..4) IP67 ⌀ 44 mm

dimmmable

- AL4000 (1..4) IP20 PUSH 0/1..10V ⌀ 72 mm
- ALD435 (1..3) IP20 DALI 2 PUSH ⌀ 36 mm
- AL4051 (1..4) IP20 DALI 2 ⌀ 72 mm
- AL4053 (1..4) IP20 PUSH IGBT-TRIAC ⌀ 56 mm
- AL6035 (1..3) IP67 DALI 2 ⌀ 44 mm
- AL8035 (2..4) IP67 DALI 2 ⌀ 48 mm

Drivers 500mA

on/off

- AL1074 (1..2) IP20 ⌀ 30 mm
- AL1077 (1..2) IP20 ⌀ 40 mm
- AL1084 (1..3) IP20 S.P. ⌀ 55 mm
- AL9051 (1..3) IP67 ⌀ 44 mm

dimmmable

- AL4010 (1..4) IP20 PUSH 0/1..10V ⌀ 72 mm
- ALD450 (1..2) IP20 DALI 2 PUSH ⌀ 36 mm
- AL4151 (1..4) IP20 DALI 2 ⌀ 72 mm
- AL4153 (1..4) IP20 PUSH IGBT-TRIAC ⌀ 56 mm
- AL6050 (1..2) IP67 DALI 2 ⌀ 44 mm
- AL8050 (2..4) IP67 DALI 2 ⌀ 48 mm