


JOEL 6 EVO

Adjustable downlights

design Roberto Mantovani

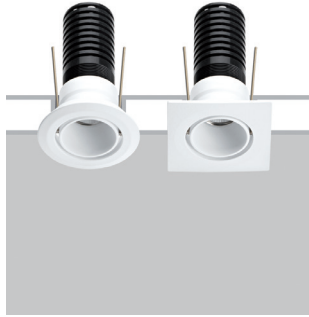

The Joel range combines extremely small dimensions with luminous fluxes suited to general lighting. The embedded optics ensures high visual comfort.

La gamma Joel combina dimensioni estremamente ridotte a flussi luminosi tali da prestarsi ad illuminazioni generali. L'ottica arretrata garantisce un elevato comfort visivo.

La gamme Joel combine des dimensions extrêmement réduites avec des flux lumineux adaptés à l'éclairage général. L'optique encastrée assure un confort visuel élevé.



IP44 made in Italy

Die Joel-Reihe kombiniert extrem kleine Abmessungen mit Lichtströmen, die für die Allgemeinbeleuchtung geeignet sind. Die versenkte Optik sorgt für hohen Sehkomfort.

La gama Joel combina dimensiones extremadamente pequeñas con flujos luminosos adecuados para iluminaciones generales. La óptica empotrada garantiza un gran confort visual.

Supply current

500 mA (V_i 9V)

Power

6 W


Series wiring

CRI


98

2-Step MacAdam

Dimensions

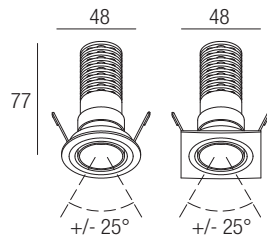


Photometric diagrams

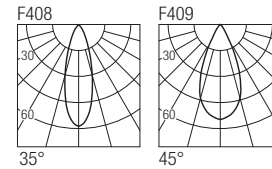

CCT/CRI/Flux

2700K	540 lm
3000K	600 lm
4000K	620 lm


Code construction

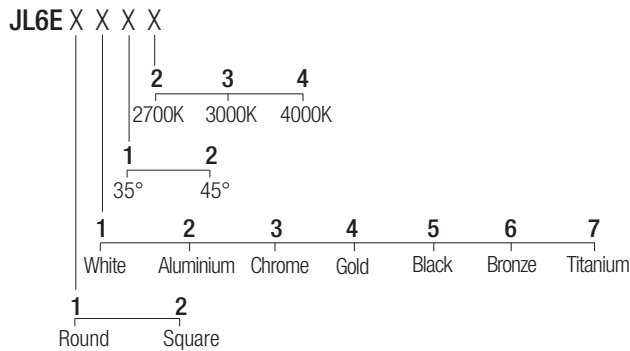

Accessories

CS1005

Recessing box



LJL6E01

Low luminance louver



SJL6E01

Milky screen



Note: The filter and the screen must be ordered together with the lighting fixture.

AL7022

24VDC/500mA constant current converter

Drivers 500mA

on/off

AL1074 (1..2) IP20 30 mm

AL1077 (1..2) IP20 40 mm

AL1084 (1..3) IP20 S.P. 55 mm

dimnable

AL4010 (1..4) IP20 PUSH 0/1..10V 72 mm

ALD450 (1..2) IP20 DALI 2 PUSH 36 mm

AL4151 (1..4) IP20 DALI 2 72 mm

AL4153 (1..4) IP20 PUSH IGBT-TRIAC 56 mm