

## JOS PT10

Trimless pendants

design Roberto Mantovani



A suspended adjustable projector for trimless recessed installation, characterized by a minimal design and high optical performance. It lends itself to accent lighting applications, giving the chance to combine various color temperatures and beam angles, with CRI85 or CRI93. Can be fitted with an anti-glare filter for maximum visual comfort.

Proiettore sospeso orientabile per installazione ad incasso trimless, connotato da un design minimale ed elevate prestazioni ottiche, si presta ad applicazioni che vanno dalla luce d'accento all'illuminazione generale. Offre la possibilità di combinare temperature colore ed aperture di fascio, con CRI85 o CRI93. Equipaggiabile con l'accessorio filtro antiabbagliamento, per assicurare il miglior comfort visivo dell'installazione.

Projecteur suspendu pour une installation encastrée trimless, caractérisé par un design minimal et de hautes performances optiques. Il se prête aux applications d'éclairage d'accentuation, donnant la possibilité de combiner différentes températures de couleur et les angles de faisceau, avec CRI85 ou CRI93. Peut être équipé d'un filtre anti-éblouissement pour un confort visuel maximal.

Abgehängter Projektor für den randlosen Einbau, der sich durch ein minimalistisches Design und eine hohe optische Leistung auszeichnet. Es eignet sich für Akzentbeleuchtungsanwendungen und bietet die Möglichkeit, verschiedene Farbtemperaturen und Abstrahlwinkel mit CRI85 oder CRI93 zu kombinieren. Kann mit einem Blendschutzfilter für maximalen Sehkomfort ausgestattet werden

CE IP20 made in Italy

**Supply current**  
500mA (V<sub>r</sub> 18V)


**Power**  
10W

**Series wiring**


**CRI**  
85-93

**2-Step MacAdam**

**Dimensions**

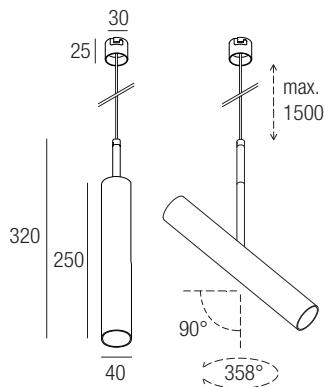


**Photometric diagrams**

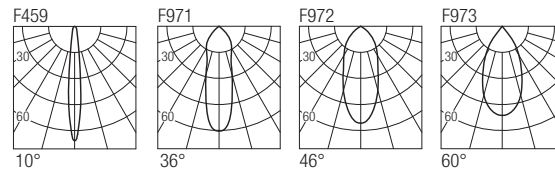

**CCT/CRI/Flux**

|       | CRI85  | CRI93 |
|-------|--------|-------|
| 2700K | 890lm  | 840lm |
| 3000K | 1000lm | 930lm |
| 4200K | 1040lm | 960lm |


**Code construction**

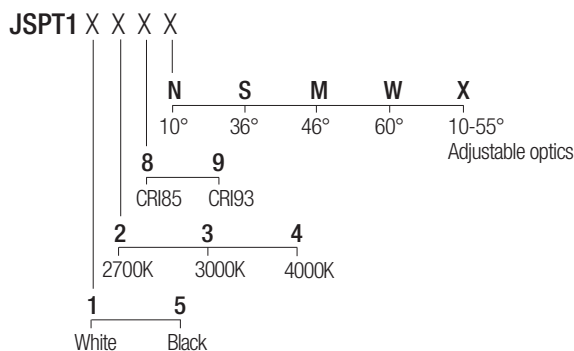

Note: Made-to-measure cable available on request.

**Accessories**

**ZQC001** White  
**ZQC001B** Black  
Plasterboard recessing frame



**LJ01** White  
**LJ01B** Black  
Low luminance louver



**SJ01** White  
**SJ01B** Black  
Milky screen



Note: The filter and screen are not compatible with the 10° and adjustable 10-55° lens versions.

**Drivers 500mA**

on/off  
**AL1074** (1) IP20 ⌀ 30 mm  
**AL1077** (1) IP20 ⌀ 40 mm  
**AL1084** (1..2) IP20 S.P. ⌀ 55 mm

dimmable  
**AL4010** (1..2) IP20 PUSH 0/1..10V ⌀ 72 mm  
**ALD450** (1) IP20 DALI 2 PUSH ⌀ 36 mm  
**AL4151** (1..2) IP20 DALI 2 ⌀ 72 mm  
**AL4153** (1..2) IP20 PUSH IGBT-TRIAC ⌀ 56 mm

**AL7022**

24VDC/500mA constant current converter