


JOS R DTW

Dim to Warm semi-recessed projector

design Roberto Mantovani



A Dim to Warm projector for semi-recessed wall or ceiling installations, it is characterised by a minimal design and high optical performance. It lends itself to applications ranging from accent lighting to general illumination.

Proiettore Dim to Warm per installazione a semi-incasso a parete o a soffitto connotato da un design minimale ed elevate prestazioni ottiche. Si presta ad applicazioni che vanno dalla luce d'accento all'illuminazione generale.

Projecteur Dim to Warm pour installation semi-encastée sur mur ou sur plafond, caractérisé par un design minimaliste et de hautes performances optiques. Il est indiqué pour les applications allant de l'éclairage d'accentuation à l'éclairage général.



IP20 made in Italy

Dim to Warm Projektor für halbversenkte Wand- oder Deckenmontage mit minimalistischem Design und hoher optischer Leistung. Eignet sich für Anwendungen, die von der Akzentbeleuchtung bis zur Allgemeinbeleuchtung reichen.

Proyector Dim to Warm para instalación semi-empotrado en pared o techo caracterizado por un diseño minimalista y un alto rendimiento óptico. Se presta a aplicaciones que van desde la iluminación de acento hasta la iluminación general.

Supply current
400mA (V_f 18V)


Power
8W

Series wiring


CRI
95

DTW 3000K to 1800K

Dimensions




Photometric diagrams

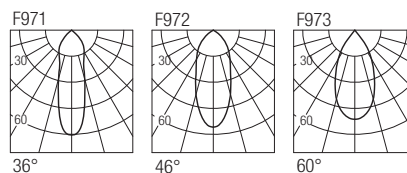

CCT/CRI/Flux

3000K	1800K
870lm	16lm

Code construction



Note: Versions with extended arm length are available upon request.

Accessories

LJ01 LJ01B

White Black

Low luminance louver



SJ01 SJ01B

White Black

Milky screen



Drivers 400mA

dimmable

AL4451 (1..2) IP20 DALI 2 50 mm