

KOINE 10

Ceiling mounted luminaires


design Roberto Mantovani



The Koine range of surface mounted fixtures combines minimal geometry with high mechanical and optical quality. Incredibly easy to install, it is ideal for applications ranging from the accenting of display elements and architectural details to general lighting.

La gamma di apparecchi a plafone Koine combina una geometria minimale ad una qualità meccanica ed ottica di alto livello. Con una notevole semplicità di installazione, si presta ad applicazioni che vanno dall'illuminazione d'accento di elementi espositivi o di dettagli architettonici all'illuminazione generale.

La gamme d'appareils à plafond Koine associe une géométrie minimaliste et une qualité mécanique et optique de haut niveau. Avec une très grande simplicité d'installation, elle se prête à des applications vont de l'éclairage de mise en valeur d'éléments architectoniques à l'éclairage général.



made in Italy

Die Produktreihe von hängenden Geräten Koine kombiniert eine minimalistische Geometrie mit mechanischer Qualität und Optik von hohem Niveau. Mit einer bemerkenswert einfachen Installation ist sie geeignet für Anwendungen von Akzentbeleuchtung von Ausstellungselementen oder architektonischen Details bis zu Allgemeinbeleuchtung.

La gama de aparatos de plafón Koine combina una geometría minimalista con una calidad mecánica y óptica de alto nivel. Gracias a su gran sencillez de instalación, es ideal para aplicaciones que van desde la iluminación puntual para resaltar elementos de exposiciones o detalles arquitectónicos hasta la iluminación general.

Supply current

250mA (V, 36V) (CC)
230VAC (AC)

Power


10W

CRI


93

2-Step MacAdam

Dimensions




Photometric diagrams

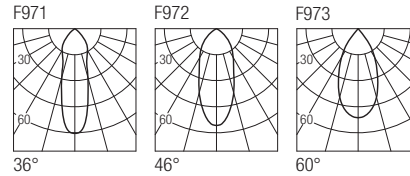

CCT/CRI/Flux

2700K	840lm
3000K	930lm
4000K	960lm

Code construction

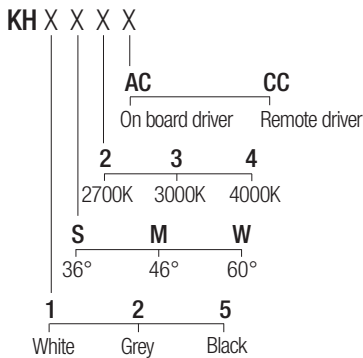

Accessories

SKH01

Milky screen 

Note: The screen must be ordered together with the lighting fixture.

Drivers 250mA (CC version only)

on/off

AL1025 (1) IP20  40 mm

dimmable

AL4030 (1) IP20 0/1..10V  55 mm

ALD425 (1) IP20 DALI 2 PUSH  36 mm

AL4031 (1) IP20 DALI 2  55 mm

AL4032 (1) IP20 IGBT-TRIAC  55 mm