


KOL EVO

Flush optic downlight

design Roberto Mantovani



The Kol EVO range combines extremely small sizes with luminous fluxes that are suitable for general lighting. Equipped with Fidelity LED it places emphasis on CRI98 and R9 93. Available in eight finishes, three colour temperatures and two extremely clean and performing optics.

La gamma Kol EVO combina dimensioni estremamente ridotte a flussi luminosi tali da prestarsi ad illuminazioni generali. Equipaggiato con LED Fidelity si connota per un CRI98 e R9 93. Disponibile in otto finiture, tre temperature colore e due ottiche estremamente pulite e performanti.

La gamme Kol EVO combine des dimensions extrêmement réduites à des flux lumineux qui lui permettent de se prêter à des éclairages généraux. Équipé avec LED Fidelity il se caractérise par un CRI98 et R9 93. Disponible dans huit finitions, trois températures couleur et deux optiques extrêmement propres et performantes.



IP44 made in Italy

Die Kol EVO-Serie kombiniert extrem kleine Abmessungen mit Lichtströmen und ist somit für die Allgemeinbeleuchtung geeignet. Ausgestattet mit Fidelity-LEDs zeichnet sie sich durch einen CRI98 und R9 93 aus. Erhältlich in acht Ausführungen, drei Farbtemperaturen und zwei extrem sauberen und leistungsstarken Optiken.

La gama Kol EVO combina dimensiones extremadamente pequeñas con flujos luminosos adecuados para iluminaciones generales. Equipado con LED Fidelity, se caracteriza por un CRI98 y R9 93. Disponible en ocho acabados, tres temperaturas de color y dos ópticas extremadamente sutiles y de alto rendimiento.

Supply current

500mA (V_i 9V)

Power

6W


Series wiring

CRI


98

2-Step MacAdam

Dimensions




Photometric diagrams



CCT/CRI/Flux

2700K	540 lm
3000K	600 lm
4000K	620 lm


Code construction

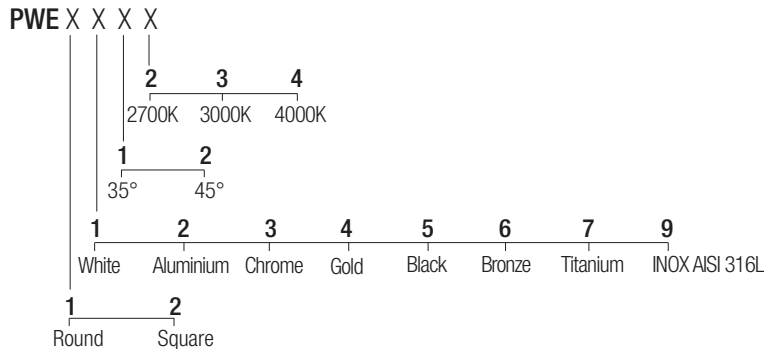

Accessories

CS1006

Recessing box



LPWE01

Low luminance louver



SPWE01

Milky screen



Note: The filter and the screen must be ordered together with the lighting fixture.

AL7022

24VDC/500mA constant current converter

Drivers 500mA

on/off

AL1074 (1..2) IP20 ⌀ 30 mm

AL1077 (1..2) IP20 ⌀ 40 mm

AL1084 (1..3) IP20 S.P. ⌀ 55 mm

dimmable

AL4010 (1..4) IP20 PUSH 0/1..10V ⌀ 72 mm

ALD450 (1..2) IP20 DALI 2 PUSH ⌀ 36 mm

AL4151 (1..4) IP20 DALI 2 ⌀ 72 mm

AL4153 (1..4) IP20 PUSH IGBT-TRIAC ⌀ 56 mm