

MAUNA 724

IP rated projectors

design Rod&Todd



24VDC IP65 projectors equipped with COB LEDs, they offer a wide range of narrow and precise light beams. Made of anodized aluminum, they are suitable for installation in particularly aggressive environments. Optical quality and fine finishes come together in a product of great reliability and quality.

Proiettori IP65 equipaggiati con COB LED alimentati a 24VDC dalle alte prestazioni luminose, in grado di offrire un'ampia gamma di aperture di fascio per effetti luminosi precisi ed efficaci. Realizzati in alluminio anodizzato sono ideali per l'installazione in ambienti particolarmente aggressivi. Qualità ottica e finiture di pregio si fondono in un prodotto di grande affidabilità e qualità.

Projecteurs à 24VDC en aluminium anodisé IP65, adaptés à l'installation dans des environnements particulièrement agressifs. La qualité optique et les finitions raffinées se combinent pour en faire un produit hautement fiable. Avec optiques très avancées, ils offrent des faisceaux lumineux étroits et précis. La gamme d'accessoires comprend le filtre anti-éblouissement pour un confort visuel maximal.

24VDC IP65-Projektoren, die mit COB-LEDs ausgestattet sind, bieten eine große Auswahl an schmalen und präzisen Lichtstrahlen. Sie bestehen aus anodisiertem Aluminium und sind für die Installation in besonders anspruchsvollen Bereichen geeignet. Optische Qualität und feine Verarbeitung sorgen für ein Produkt von höchster Zuverlässigkeit und Qualität.

IP65 made in Italy



Supply current

24VDC

Power

7W


Parallel wiring

CRI


85-93

2-Step MacAdam

Dimensions



Photometric diagrams

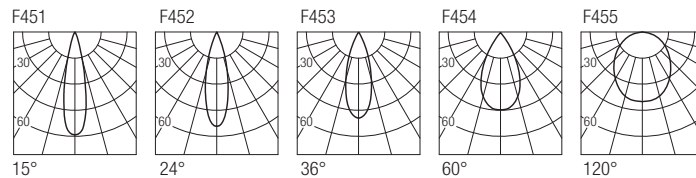


CCT/CRI/Flux

	CRI85	CRI93
2700K	630lm	590lm
3000K	700lm	650lm
4000K	730lm	670lm


Code construction

MU24 X X X X

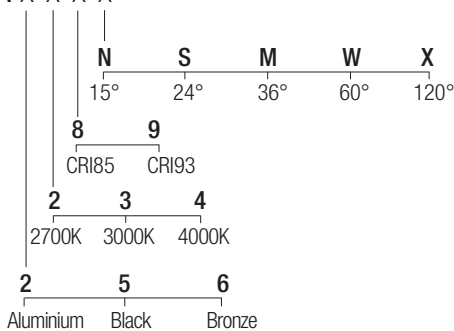

Note: Made-to-measure cable available on request.

Accessories



ESMU2401
Earth spike




XP0200 Aluminium
XP0500 Black
XP0600 Bronze
Base



LMU2401
Low luminance louver

Note: The filter must be ordered together with the lighting fixture.



XNTX202 Aluminium
XNTX205 Black
XNTX206 Bronze
Antiglare snoot



XXT01
Tree strap

Drivers 24VDC

on/off
AL2124 (1) IP20 ⌀ 28 mm
AL2012 (1..3) IP20 ⌀ 60 mm
AL2031 (1..10) IP20 ⌀ 70 mm
AL2040 (1..21) IP20 ⌀ 80 mm
AL9222 (1..5) IP67 ⌀ 44 mm
AL9231 (1..10) IP67 ⌀ 85 mm
AL9240 (1..21) IP67 ⌀ 85 mm

dimmable
AL5012 (1..3) IP20 DALI 2 PUSH 0/1..10V ⌀ 45 mm
AL5241 (1..14) IP20 DALI 2 PUSH ⌀ 70 mm
AL8012 (1..3) IP67 DALI 2 ⌀ 48 mm
 dimming module
AL7035 IP20 DALI 2 PUSH 0/1..10V ⌀ 44 mm

Note: Dimming module AL7035 to be used in combination with a 24VDC power supply.