


MOON QX120

Trimless downlights

design Lapo Grassellini

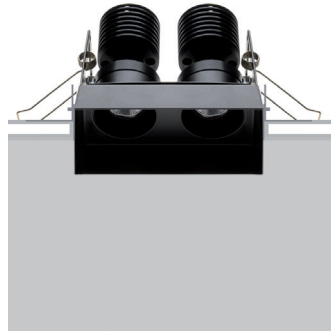

The Moon range of trimless, recessed fixtures matches utmost performance to incredible compactness. Recessed optics guarantees high viewing comfort. Revolutionary in dissipative, functional design, it offers the possibility to combine colour temperatures and beam angles in CRI85 and CRI93 versions.

La gamma di incassi trimless Moon combina altissime prestazioni ad una dimensione incredibilmente contenuta. L'ottica arretrata garantisce un alto comfort visivo. Rivoluzionari per il design funzionale alla dissipazione, offrono la possibilità di combinare temperature colore ed aperture di fascio nelle versioni a CRI85 ed a CRI93.

La gamme d'encastables trimless Moon associe prestations très élevées et dimension incroyablement contenue. L'optique en retrait garantit un confort visuel élevé. Révolutionnaires pour le design fonctionnel à la dissipation, ils offrent la possibilité d'associer températures, couleur et ouvertures de faisceau dans les versions à CRI85 et à CRI93.

Die Produktreihe von Einbauleuchten trimless Moon kombiniert beste Leistungen mit einer unglaublich kompakten Größe. Die Einbauroptik garantiert einen hohen visuellen Komfort. Revolutionär durch ihr funktionales Design zur Ableitung, bietet sie die Möglichkeit, Farbtemperaturen und Strahlenbündel in den Versionen CRI85 und CRI93 zu kombinieren.

IP44 made in Italy




Supply current
250mA (V, 2x36V)

Power
2x10W


CRI
85-93

2-Step MacAdam

Dimensions

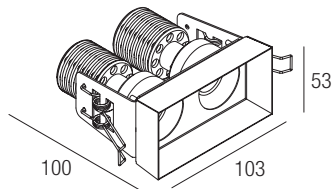

Photometric diagrams

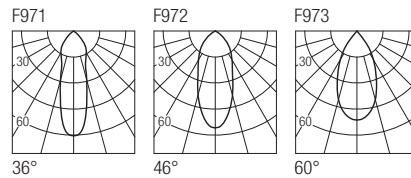


CCT/CRI/Flux (2x)

	CRI85	CRI93
2700K	890lm	840lm
3000K	1000lm	930lm
4000K	1040lm	960lm

Code construction


MQX12 X X X X

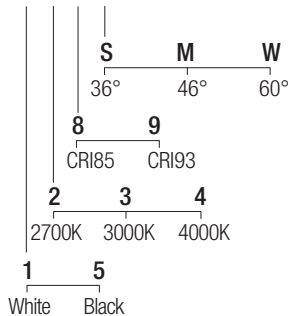

Accessories

MQX12Q MQX12QB
White Black

Plasterboard recessing frame

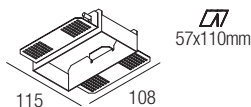

LOH1X2 LOH1X2B (2 pcs)
White Black

Low luminance louver



SMQX1201 (2 pcs)
Milky screen

Note: The screen must be ordered together with the lighting fixture.

Drivers 250mA

on/off

AL1025 (1) IP20 ⌀40 mm

dimmable

AL4030 (1) IP20 0/1..10V ⌀55 mm

ALD425 (1) IP20 DALI 2 PUSH ⌀36 mm

AL4031 (1) IP20 DALI 2 ⌀55 mm

AL4032 (1) IP20 IGBT-TRIAC ⌀55 mm

Note: Each fixture needs 2 drivers.