

OLU 6 POLE

IP rated projector for Pole system

design Roberto Mantovani



The Olu range offers IP65 anodized aluminium spotlights, suitable for installation in particularly aggressive environments. Optical quality and fine finishes combine to make a highly reliable product. Can be equipped with anti-glare filter for maximum visual comfort.

La gamma Olu offre proiettori IP65 in alluminio anodizzato, ideali all'installazione in ambienti particolarmente aggressivi. Qualità ottica e finiture di pregio si fondono in un prodotto di grande affidabilità. Equipaggiabili con filtro antiabbagliamento per il massimo comfort visivo.

La gamme Olu propose des projecteurs IP65 en aluminium anodisé, adaptés pour l'installation dans des milieux particulièrement agressifs. Qualité optique et finitions de qualité fusionnent dans un produit de grande fiabilité. Peut être équipé avec filtre anti-éblouissement pour le meilleur confort visuel.

Die Olu-Reihe bietet IP65-Projektoren aus eloxiertem Aluminium, die sich für den Einbau in besonders aggressiven Umgebungen eignen. Optische Qualität und feine Oberflächen vereinen sich in einem Produkt mit hoher Zuverlässigkeit. Kann mit einem Blendfilter für maximalen Sehkombfort ausgestattet werden.

La gama Olu ofrece proyectores IP65 de aluminio anodizado, adecuados para la instalación en ambientes especialmente agresivos. La calidad óptica y los acabados finos se combinan en un producto de gran fiabilidad. Se puede equipar con un filtro antideslumbrante para un máximo confort visual.

CE IP65 made in Italy

Supply current
350-500mA (V, 8,7V)


Power
3-6W

Series wiring


CRI
85

2-Step MacAdam

Dimensions




Photometric diagrams

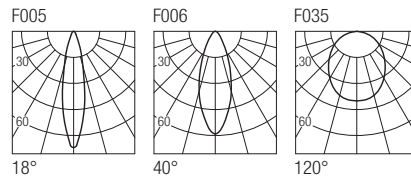

CCT/CRI/Flux

| | 350mA | 500mA |
|-------|-------|-------|
| 2700K | 267lm | 384lm |
| 3000K | 279lm | 400lm |
| 4200K | 309lm | 462lm |
| 6000K | 342lm | 495lm |

Code construction

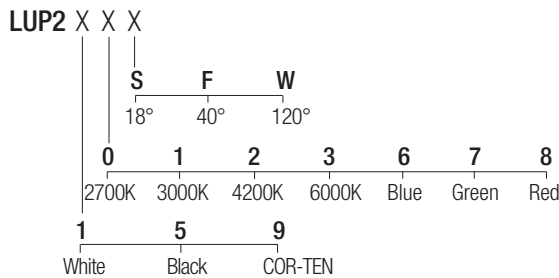

Note: Made-to-measure cable available on request.

Accessories

XNTC01V **XNTC05V** **XNTC09V**
White Black COR-TEN

Antiglare snoot



LLUP201
Low luminance louver



Note: The filter must be ordered together with the lighting fixture.

Drivers 350mA

on/off
AL1034 (1..3) IP20 ⌀30 mm
AL1035 (1..3) IP20 ⌀40 mm
AL1037 (1..5) IP20 S.P. ⌀55 mm
AL9011 (1..4) IP67 ⌀44 mm
 dimmable
AL4000 (1..4) IP20 PUSH 0/1..10V ⌀72 mm
ALD435 (1..3) IP20 DALI 2 PUSH ⌀36 mm
AL4051 (1..4) IP20 DALI 2 ⌀72 mm
AL4053 (1..4) IP20 PUSH IGBT-TRIAC ⌀56 mm
AL6035 (1..3) IP67 DALI 2 ⌀44 mm
AL8035 (2..4) IP67 DALI 2 ⌀48 mm

Drivers 500mA

on/off
AL1074 (1..2) IP20 ⌀30 mm
AL1077 (1..2) IP20 ⌀40 mm
AL1084 (1..3) IP20 S.P. ⌀55 mm
AL9051 (1..3) IP67 ⌀44 mm
 dimmable
AL4010 (1..4) IP20 PUSH 0/1..10V ⌀72 mm
ALD450 (1..2) IP20 DALI 2 PUSH ⌀36 mm
AL4151 (1..4) IP20 DALI 2 ⌀72 mm
AL4153 (1..4) IP20 PUSH IGBT-TRIAC ⌀56 mm
AL6050 (1..2) IP67 DALI 2 ⌀44 mm
AL8050 (2..4) IP67 DALI 2 ⌀48 mm