

RAUL 10 TRIMLESS

Trimless & adjustable downlights

design Lapo Grassellini



The Raul Trimless range of orientable, recessed fixtures matches utmost performance to incredible compactness. Recessed optics guarantees high viewing comfort. Revolutionary in dissipative, functional design, it offers the possibility to combine colour temperatures and beam angles in CRI85 and CRI93 versions.

La gamma di incassi orientabili Raul Trimless combina altissime prestazioni ad una dimensione incredibilmente contenuta. L'ottica arretrata garantisce un alto comfort visivo. Rivoluzionari per il design funzionale alla dissipazione, offrono la possibilità di combinare temperature colore ed aperture di fascio nelle versioni a CRI85 ed a CRI93.

La gamme d'encastrables orientables Raul Trimless associe prestations très élevées et dimension incroyablement contenue. L'optique en retrait garantit un confort visuel élevé. Révolutionnaires pour le design fonctionnel à la dissipation, ils offrent la possibilité d'associer températures, couleur et ouvertures de faisceau dans les versions à CRI85 et à CRI93.

Die Produktreihe von ausrichtbaren Einbauleuchten Raul Trimless kombiniert beste Leistungen mit einer unglaublich kompakten Größe. Die Einbauoptik garantiert einen hohen visuellen Komfort. Revolutionär durch ihr funktionales Design zur Ableitung, bietet sie die Möglichkeit, Farbtemperaturen und Strahlenbündel in den Versionen CRI85 und CRI93 zu kombinieren.

IP40 made in Italy

Supply current

250mA (V, 36V)

Power


10W

CRI


85-93

2-Step MacAdam

Dimensions



Photometric diagrams

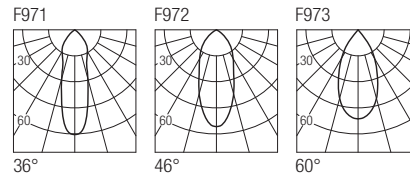


CCT/CRI/Flux

	CRI85	CRI93
2700K	890lm	840lm
3000K	1000lm	930lm
4000K	1040lm	960lm

Code construction

RT1 X X X X

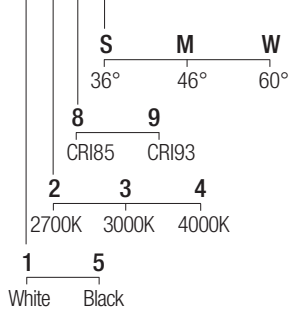


Accessories

MQC003 MQC003B

White Black

Plasterboard recessing frame



LOH1 LOH1B

White Black

Low luminance louver



SRT101

Milky screen



Note: The screen must be ordered together with the lighting fixture.

Drivers 250mA

on/off

AL1025 (1) IP20 40 mm

dimmable

AL4030 (1) IP20 0/1..10V 55 mm

ALD425 (1) IP20 DALI 2 PUSH 36 mm

AL4031 (1) IP20 DALI 2 55 mm

AL4032 (1) IP20 IGBT-TRIAC 55 mm