


TYZAN

Trimless IP rated downlight

design Roberto Mantovani

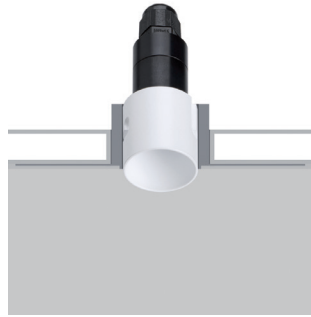

IP67 trimless recessed fixtures of the highest quality construction with extremely compact dimensions. Body in anodized aluminium, versions with the front mask in anodised aluminium and powder-coated. Toughened extra-clear glass, ATEX cable gland, neoprene cord. Recessed optics ensure high visual comfort.

Incassi trimless IP67 di altissima qualità costruttiva con dimensioni estremamente contenute. Corpo in alluminio anodizzato a spessore, versioni con frontale in alluminio anodizzato e verniciato a polveri. Vetro extrachiario temprato, pressacavo ATEX, cavo in neoprene. L'ottica arretrata garantisce un alto comfort visivo.

Encastrables trimless IP67 de très haute qualité constructive, avec des dimensions extrêmement contenues. Corps en aluminium anodisé à épaisseur, versions avec frontal en aluminium anodisé et peint en poudre. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. L'optique en retrait garantit un confort visuel élevé.

IP67 - Trimless - Einbauleuchten höchster Bauqualität bei extrem kleinen Abmessungen. Gehäuse aus dick eloxiertem Aluminium, Ausführungen mit eloxierter und pulverbeschichteter Aluminiumfront. Speziell klares Hartglas, ATEX-Kabelverschraubung, Neoprenkabel. Die Rückwärtsoptik garantiert hohen Sehkomfort.

IP67 made in Italy



Supply current

350mA (V_i 2,9V)

Power

1W


Series wiring

CRI


85

2-Step MacAdam

Dimensions




Photometric diagrams

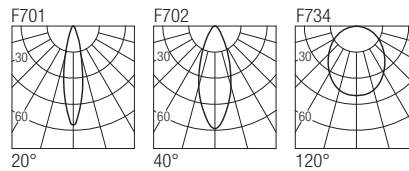

CCT/CRI/Flux


2700K	101lm
3000K	109lm
4200K	116lm
6000K	132lm

Code construction

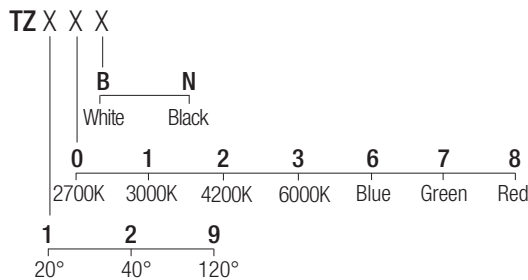

Accessories

ZQC001 **ZQC001B**
White Black
Plasterboard recessing frame



Drivers 350mA

on/off
AL1034 (1..11) IP20 30 mm
AL1035 (1..11) IP20 40 mm
AL1037 (1..16) IP20 S.P. 55 mm
AL9011 (1..12) IP67 44 mm

dimmmable
AL4000 (1..12) IP20 PUSH 0/1..10V 72 mm
ALD435 (1..11) IP20 DALI 2 PUSH 36 mm
AL4051 (2..14) IP20 DALI 2 72 mm
AL4053 (1..14) IP20 PUSH IGBT-TRIAC 56 mm
AL6035 (2..8) IP67 DALI 2 44 mm
AL8035 (4..16) IP67 DALI 2 48 mm