


ZERUS 2

Trimless IP rated downlight

design Roberto Mantovani

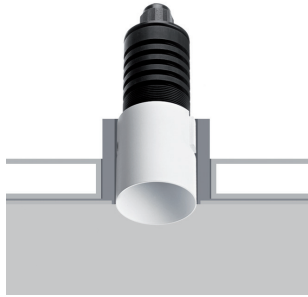

IP67-rated, trimless fixtures of the highest build quality, extremely compact dimensions and high output. Recessed optics guarantee high viewing comfort. Extra-clear tempered glass, ATEX cable gland, neoprene cable. Can also be installed with anti-glare filter for maximum viewing comfort.

Incassi trimless IP67 di altissima qualità costruttiva, con dimensioni estremamente contenute ed elevati flussi luminosi. L'ottica arretrata garantisce un alto comfort visivo. Vetro extrachiaro temprato, pressacavo ATEX, cavo in neoprene. Equipaggiabili con filtro antiabbagliamento per il massimo comfort visivo.

Encastrables trimless IP67 de très haute qualité constructive, avec des dimensions extrêmement contenues et flux lumineux élevés. L'optique en retrait garantit un confort visuel élevé. Verre extra-clair trempé, presse-étoupe ATEX, câble en néoprène. Peuvent être équipés avec filtre anti-éblouissement pour le meilleur confort visuel.

Trimless Einbau mit Schutzklasse IP67 mit hoher konstruktiver Qualität von extrem kleiner Größe und hohen Lichtströmen. Die Einbauoptik garantiert einen hohen visuellen Komfort. Extra gehärtetes Glas, ATEX Kabeldurchführung, Neopren-Kabel. Kann mit Blendschutzfilter ausgestattet werden für maximalen visuellen Komfort.

CE  **IP67 made in Italy**

Empotrados trimless IP67 de altísima calidad constructiva, con tamaño sumamente reducido y elevados flujos luminosos. La óptica retrocedida garantiza un alto confort visual. Vidrio ultraclaro templado, prensacables ATEX, cable de neopreno. Se pueden equipar con filtro antideslumbramiento para obtener el máximo confort visual.

Supply current
350-500mA (V, 2.9V)


Power
1-2W

Series wiring


CRI
85

2-Step MacAdam

Dimensions




Photometric diagrams

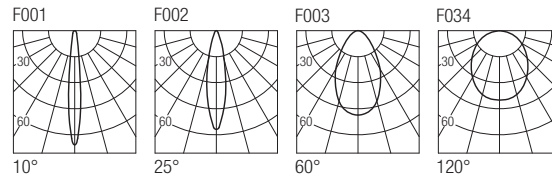

CCT/CRI/Flux


	350mA	500mA
2700K	89lm	128lm
3000K	93lm	133lm
4200K	103lm	154lm
6000K	114lm	165lm

Code construction

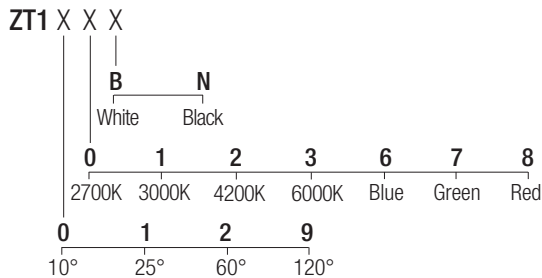

Accessories

ZQT00U ZQT00UB
White Black
Plasterboard recessing frame



LZT101
Low luminance louver



Note: The filter must be ordered together with the lighting fixture.

Drivers 350mA

on/off
AL1034 (1..11) IP20 ⌀ 30 mm
AL1035 (1..11) IP20 ⌀ 40 mm
AL1037 (1..16) IP20 S.P. ⌀ 55 mm
AL9011 (1..12) IP67 ⌀ 44 mm

dimmable
AL4000 (1..12) IP20 PUSH 0/1..10V ⌀ 72 mm
ALD435 (1..11) IP20 DALI 2 PUSH ⌀ 36 mm
AL4051 (2..14) IP20 DALI 2 ⌀ 72 mm
AL4053 (1..14) IP20 PUSH IGBT-TRIAC ⌀ 56 mm
AL6035 (2..8) IP67 DALI 2 ⌀ 44 mm
AL8035 (4..16) IP67 DALI 2 ⌀ 48 mm

Drivers 500mA

on/off
AL1074 (1..7) IP20 ⌀ 30 mm
AL1077 (1..6) IP20 ⌀ 40 mm
AL1084 (1..11) IP20 S.P. ⌀ 55 mm
AL9051 (1..11) IP67 ⌀ 44 mm

dimmable
AL4010 (1..12) IP20 PUSH 0/1..10V ⌀ 72 mm
ALD450 (1..7) IP20 DALI 2 PUSH ⌀ 36 mm
AL4151 (2..14) IP20 DALI 2 ⌀ 72 mm
AL4153 (1..14) IP20 PUSH IGBT-TRIAC ⌀ 56 mm
AL6050 (2..6) IP67 DALI 2 ⌀ 44 mm
AL8050 (4..16) IP67 DALI 2 ⌀ 48 mm