

ZOOM IP rated projectors

design Lapo Grassellini



The zoom range offers IP65-rated, micro-spotlights with adjustable optics in anodized aluminium, ideal for installation in particularly aggressive environments. Turning its optical head changes beam width. Optical quality and fine finishes combine to make a highly dependable product. Using the base accessory you can install the ceiling or wall unit.

La gamma Zoom offre microproiettori IP65 ad ottica regolabile in alluminio anodizzato, idonei all'installazione in ambienti particolarmente aggressivi. Ruotando la testa dell'apparecchio si può modificare l'ampiezza del fascio luminoso. Qualità ottica e finiture di pregio si fondono in un prodotto di grande affidabilità. Tramite l'accessorio base è possibile installare l'apparecchio a soffitto o parete.

La gamme Zoom propose des micro-projecteurs IP65 à optique réglable en aluminium anodisé, adaptés pour l'installation dans des milieux particulièrement agressifs. En tournant la tête de l'appareil, on peut modifier l'étendue du faisceau lumineux. Qualité optique et finitions de qualité fusionnent dans un produit de grande fiabilité. Avec l'accessoire base, il est possible d'installer l'appareil au plafond ou au mur.

Die Produktreihe Zoom bietet Mikro-Leuchten mit Schutzklasse IP65 mit verstellbarer Optik aus eloxierten Aluminium, geeignet für die Installation in besonders aggressiven Umgebungen. Durch Drehen des Gerätekopfes kann die Weite des Lichtbündels geändert werden. Optische Qualität und feine Ausführungen verbinden sich in einem Produkt von großer Zuverlässigkeit. Mit dem Basiszubehör kann das Gerät an der Decke oder der Wand installiert werden.

IP65 made in Italy

Supply current
350-500mA (V, 2.9V)


Power
1-2W

Series wiring

CRI
85

2-Step MacAdam

Dimensions




Adjustable optics
10°-55°

CCT/CRI/Flux

	350mA	500mA
2700K	89lm	128lm
3000K	93lm	133lm
4200K	103lm	154lm
6000K	114lm	165lm

Code construction

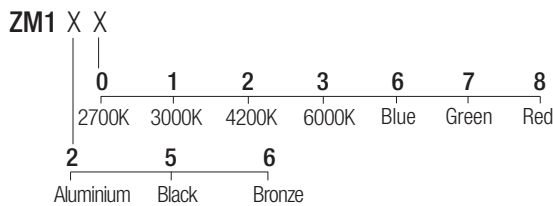

Note: Made-to-measure cable available on request.

Accessories

XP0011
Earth spike

XP0200 Aluminium
XP0500 Black
XP0600 Bronze

Base

XNTZ102 Aluminum
XNTZ105 Black
XNTZ106 Bronze

Antiglare snoot

XXT01
Tree strap

Drivers 350mA

on/off
AL1034 (1..11) IP20 ⌀ 30 mm
AL1035 (1..11) IP20 ⌀ 40 mm
AL1037 (1..16) IP20 S.P. ⌀ 55 mm
AL9011 (1..12) IP67 ⌀ 44 mm

dimmmable
AL4000 (1..12) IP20 PUSH 0/1..10V ⌀ 72 mm
ALD435 (1..11) IP20 DALI 2 PUSH ⌀ 36 mm
AL4051 (2..14) IP20 DALI 2 ⌀ 72 mm
AL4053 (1..14) IP20 PUSH IGBT-TRIAC ⌀ 56 mm
AL6035 (2..8) IP67 DALI 2 ⌀ 44 mm
AL8035 (4..16) IP67 DALI 2 ⌀ 48 mm

Drivers 500mA

on/off
AL1074 (1..7) IP20 ⌀ 30 mm
AL1077 (1..6) IP20 ⌀ 40 mm
AL1084 (1..11) IP20 S.P. ⌀ 55 mm
AL9051 (1..11) IP67 ⌀ 44 mm

dimmmable
AL4010 (1..12) IP20 PUSH 0/1..10V ⌀ 72 mm
ALD450 (1..7) IP20 DALI 2 PUSH ⌀ 36 mm
AL4151 (2..14) IP20 DALI 2 ⌀ 72 mm
AL4153 (1..14) IP20 PUSH IGBT-TRIAC ⌀ 56 mm
AL6050 (2..6) IP67 DALI 2 ⌀ 44 mm
AL8050 (4..16) IP67 DALI 2 ⌀ 48 mm